

MARS-533-134X2M-TN-SWIR F02

5.3MP CMOS CXP2.0 Area Scan Camera



MARS-533-134X2M-TN-SWIR F02 camera is equipped with Sony IMX992 Global shutter sensor and uses CoaXPress interface for high-speed transmission of image data, featuring high quality images, low power consumption, high transmission speed, stable operating capability.


Applications

Suitable for applications such as wafer inspection, AOI inspection, spots inspection, medical inspection and so on.

Features

- PRNU, DSNU, FFC, Static Defect Correction
- The Sequencer Control supports parameter configuration of exposure, gain, and Gamma up to 8 groups
- Gamma, Black Level, Sharpness, Noise Reduction, Timer, Counter, LUTs and User Set Control
- DAHENG IMAGING or third-party frame grabbers are available

Spectral Response

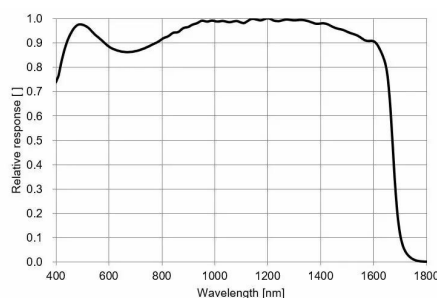

Specifications


Model	MARS-533-134X2M-TN-SWIR F02
Resolution	2592(H) × 2056(V)
Sensor	Sony IMX992 Global shutter CMOS
Sensor Format	1/1.4"
Pixel Size	3.45μm × 3.45μm
Frame Rate	134fps
ADC	8 bit, 10 bit, 12 bit
Pixel Bit Depth	8 bit, 10 bit, 12 bit
Mono/Color	Mono, SWIR
Pixel Formats	Mono8 / Mono10 / Mono12
SNR	46.245 dB
Exposure Time	Ultra short: 6μs~26μs, Actual Steps: 1μs Standard: 27μs~1s, Actual Steps: 1μs
Gain	Analog Gain: 0dB~16dB, Default: 0dB, Steps: 0.1dB Digital Gain: 0dB~24dB, Default: 0dB, Steps: 0.1dB
Binning	Horizontal: FPGA X1 X2 X4, Mode: Average, Sum
Decimation	Sensor: 1×1, 2×2
Synchronization	Hardware trigger, software trigger
Acquisition Control	Single frame, Continuous, Software trigger, Hardware trigger
Reverse X/Y	Reverse X/Y
I/O Interface	1 input and 1 output with opto-isolated, 1 bidirectional programmable GPIO, 1 RS232
Data Interface	CXP-12 × 1 (HD-BNC)
Power Supply	24 VDC or PoCXP
Power Consumption	5.209W@PoCXP (The target temperature for TEC is 15°C)
Operating Temp.	0° C ~ +45° C
Storage Temp.	-20° C ~ +70° C
Operating Humidity	10% ~ 80%
Cooling	TEC, Passive cooling, optional: Heat Dissipation Fins
Lens Mount	C
Color filter/ translucent film	-
Dimensions	62(W) × 62(H) × 80.5(L) mm (without C mount)
Weight	489 g
Software	DAHENG IMAGING or third-party frame grabbers supporting software
OS	Win7 / Win8 / Win10 / Win11
Conformity	CE, RoHS, FCC, ICES, UKCA, CoaXPress2.0, GenICam

I/O Interface



Pin	Definition	Description
1	Line 0+	Opto-isolated input +
2	GND	PWR GND & GPIO GND
3	Line 0-	Opto-isolated input -
4	POWER_IN	Camera external power 24VDC ($\pm 10\%$)
5	Line 2	GPIO input/output
6	RS232 Rx	RS232 receive
7	Line 1-	Opto-isolated output -
8	Line 1+	Opto-isolated output +
9	GND	PWR GND & GPIO GND
10	GND	PWR GND & GPIO GND
11	POWER_IN	Camera external power 24VDC ($\pm 10\%$)
12	RS232 Tx	RS232 transmit

Technical Drawing

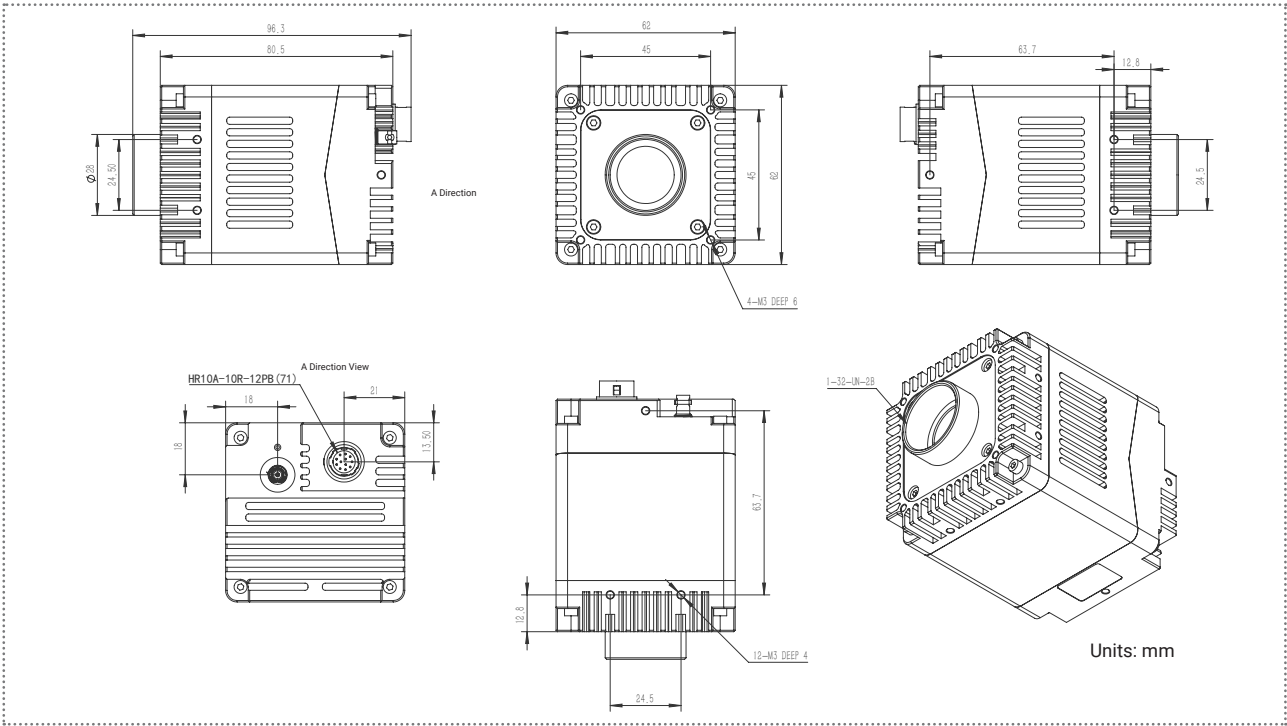

China Daheng Group, Inc. Beijing Image Vision Technology Branch

12F Daheng Science & Technology Tower, No.3 Suzhou Street, Haidian District, Beijing China, 100080

Tel: +86 10 82828878

E-mail: isales@daheng-imaging.com